



Hydraulic Bollards


For Apartments & Commercial purpose
SP BLD HY



SP BLD HY



Hydraulic Bollard Controller

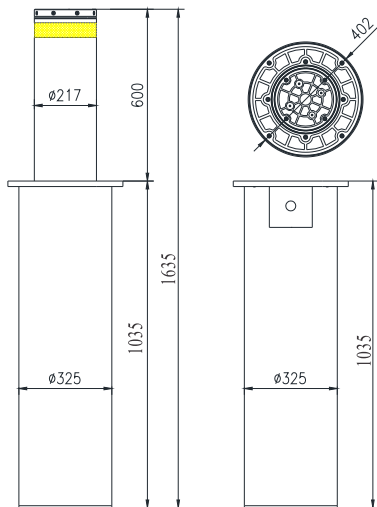

Applications

- Embassy / Govt. & Defence / Hotels / Apartments / Parking Area

Features

- Stainless Steel # 304 body
- 230V/ 50Hz / 1 Phase Operation
- 4 Sec UP & DOWN Time
- **Crash Rated Quality**
- Waterproof & Stronger 6 mm Body
- Hydraulic / Electro Mechanical (option)
- LED Strips & Reflector on Top
- 3/6 Bollard Controller(Hydraulic)
- Can be integrated with Access Control
- Easy Installation

Model	SP BLD HY EM
AC Input Voltage	230V / 50Hz / 1 P
AC Input Power	500 W / Per Bollard
Bollard Cylinder Diameter	220 mm
Bollard Height	600 mm
Bollard Body & Thickness	Stainless Steel SS#304 / 6 mm
UP & Down	4 Sec
Waterproof	Yes
Motor Type	Hydraulic
Controller (Hydraulic)	3 / 6 Bollard control

* Specification are subjected to change for improvements