



## Barrier Gate

For Residential, Commercial & Industrial purpose  
**SP BB 200 series**



SP BB 200 8M6S




CONTROLLER PCB

## Heavy Duty AC Motor



SP BB 200 FOLDING

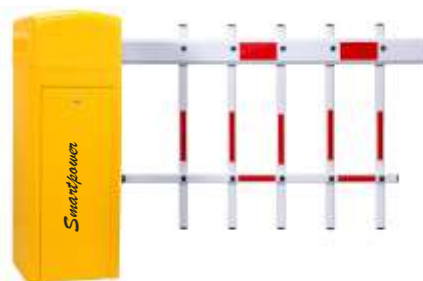


SP BB 200 FENCING

### Applications

- Signalling, Safety & Parking Control at Railways, Airports, Roads, Parks, Apartments

### Features

- Electro Mechanical System
- 6 Meter Telescopic Boom
- AC Heavy Duty Motor
- Double Spring Technology
- Auto Reverse on obstacle
- Thermal Shutdown protection
- Compatible with access control
- Waterproof Box

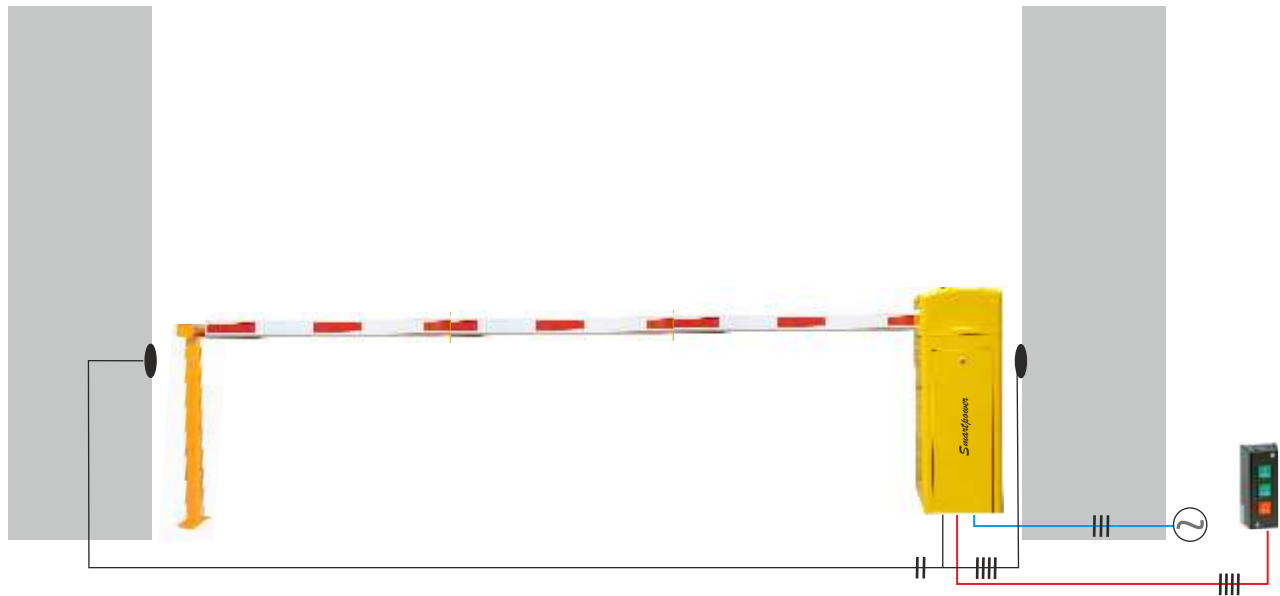

## Standard Accessories



Safety Sensor

Remote Control

Wireless Push Switch

## Optional Accessories



Loop Detector ( Double)

Traffic Signal



Model	SP BB 200 8M6S	SP BB FENCING	SP BB FOLDING
AC Input Voltage	230V / 50Hz / 1 P	230V / 50Hz / 1 P	230V / 50Hz / 1 P
AC Input Power	200W	200W	200W
Motor Type	AC Geared Heavy Duty	AC Geared Heavy Duty	AC Geared Heavy Duty
Motor Output Power	480 Nm	480 Nm	480 Nm
Opening & Closing Speed	6 Sec	6 Sec	6 Sec
Life Cycle ( MTBF)	4.5 Million	4.5 Million	4.5 Million
Barrier Box Dimension / Wt	60 Kg	60 Kg	60 Kg
Duty Cycle	24 Hours	3500 Times / Day	3500 Times / Day
Boom Type	Telescopic 8 Mt	4.5 Mt Fencing	5.0 Mt Folding

\* Specification are subjected to change for improvements