

Hand Crank Operation  
(During power fail)

## Features

- Noise Less Sleek Tubular Motor with Carbon Steel Gears
- Thermal Protection / Built in Speed reducer / Limit Switch
- Digital Lock Remote Control / Hand Crank (On Power Fail)

## Applications


- Rolling Shutters used in Residence / Apartments / Shops
- Godowns / Hotels / Banks etc upto 150 Sq feet ( 250 Kgs)



Tubular Motor



Spring to enhance load capacity

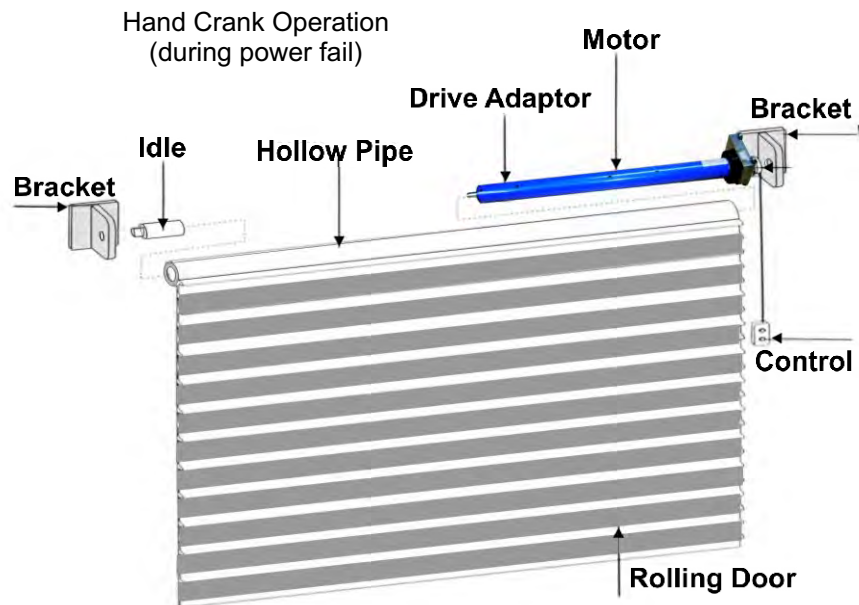

## Technical parameters

Model	Door Wt/kg	Door Height	Voltag	Load	Torque	RPM	SHAFT	Manual Operation
SM ACM RD 45	75	3 Mt	230 V	282 W	50Nm	12~17	3"	Hand Crank
SM ACM RD 59	150	3 Mt	230 V	430 W	100Nm	12~14	3"	Hand Crank
SM ACM RD 92	250	4 Mt	230 V	950 W	300Nm	7~9	5"	Hand Crank