

## Door Metal Frame Detector

### For Commercial Use SP DFMD

## 1/12 Zone


**Operations** - SP DFMD ( Door Frame Metal Detector ) operations are simple. On Power ON it starts working in Self Diagnostic Mode. No need of any routine calibration. It is easy to install with just 2 cables & 8 screws.

SP DFMD Access Control Panel is password protected. Only Operator can Access. It has LED Display for No of Visitors and No of Alarms. It also has RED LED Sign with Alarm when any Metal is detected.

### Applications

- For Malls / Complex / Hotels / Airport / Railway Station / Bus Stand / Factory / Bank / Hospitals

Gross Weight 45 Kg  
Power Supply 230V AC  
Working Temp - -20 C--+55 C  
Working Frequency - 4-8 KHz  
Standard Ext Size - 2203 (H)x860(W)x480 mm(D)  
Standard Int Size - 1980 (H)x700(W)x400 mm(D)  
Door Panel Package- 2260 x 550 x 235 mm ( 1 Carton)  
Control Unit Package-750 x 340 x 240 mm ( 1 Carton)

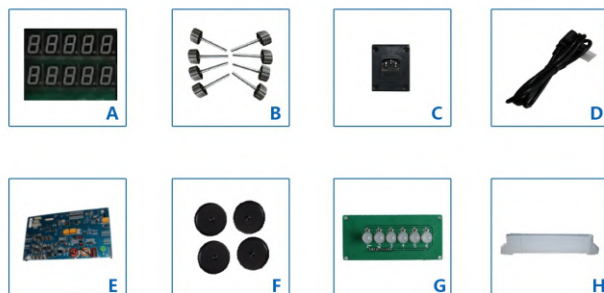

### Product Packaging



Recycling

Carton Dimension L\*W\*H (mm)  
Door Panel : 2260\*550\*235 mm  
Control Unit : 750\*340\*240 mm  
Gross weight : 45KG