

Smartpower®



Boom Barrier

For Residential, Commercial & Industrial purpose
SP BB 200 series



SP BB 200 8M6S




CONTROLLER PCB

Heavy Duty Motor



SP BB 200 FOLDING

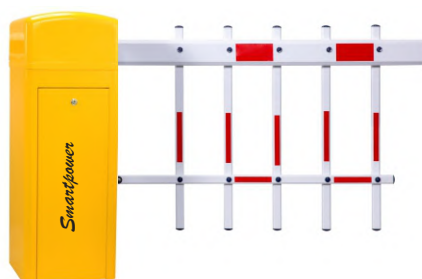

SP BB 200 FENCING


Applications

- Signalling, Safety & Parking Control at Railways, Airports, Roads, Parks, Apartments

Features

- Electro Mechanical System
- 6 Meter Telescopic Boom
- AC Heavy Duty Motor
- Double Spring Technology
- Auto Reverse on obstacle
- Thermal Shutdown protection
- Compatible with access control
- Waterproof Box

Boom Barrier SP BB 200

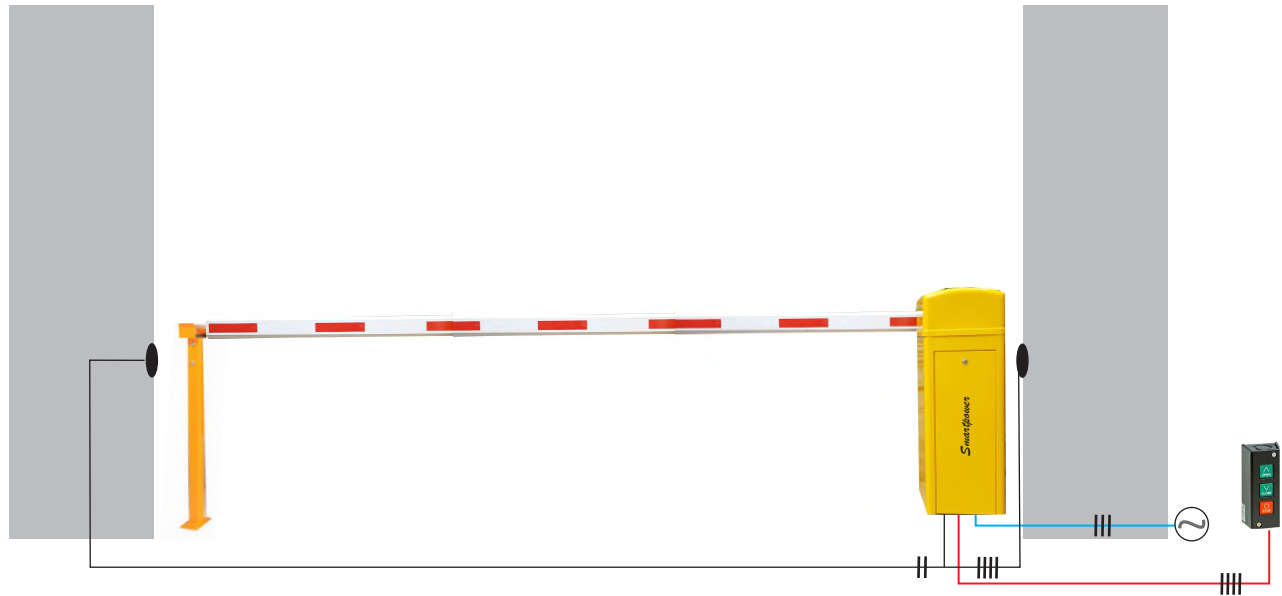

Standard Accessories



Safety Sensor

Remote Control


Wireless Push Switch

Optional Accessories



Loop Detector (Double)

Traffic Signal



Model	SP BB 200 8M6S	SP BB FENCING	SP BB FOLDING
AC Input Voltage	230V / 50Hz / 1 P	230V / 50Hz / 1 P	230V / 50Hz / 1 P
AC Input Power	200W	200W	200W
Motor Type	AC Geared Heavy Duty	BLDC Motor	BLDC Motor
Motor Output Power	480 Nm	480 Nm	480 Nm
Opening & Closing Speed	6 Sec	6 Sec	6 Sec
Life Cycle (MTBF)	4.5 Million	4.5 Million	4.5 Million
Barrier Box Dimension / Wt	60 Kg	60 Kg	60 Kg
Duty Cycle	24 Hours	1000 Times / Day	1000 Times / Day
Boom Type	Telescopic 8 Mt	4.5 Mt Fencing	5.0 Mt Folding

* Specification are subjected to change for improvements